

YORK®



POMPA AIR BERKUALITAS & TERPERCAYA

www.york-jp.co.id

KATALOG POMPA AIR


SCAN ME



Tersedia di : **QHOME MART**

Aplikasi pemasangan pompa dalam rumah tangga

1	POMPA SUMUR DANGKAL / PENDORONG	4 - 6
2	POMPA SEMI - JET / PENDORONG	7 - 8
3	POMPA JET PUMP	9 - 11
4	BOOSTER PUMP	12 - 13
5	SUBMERSIBLE PUMP	14
6	POMPA CELUP AIR BERSIH 24 JAM	15
7	MAGNETIC PUMP / 24 JAM	16
8	POMPA AQUARIUM	17
9	POMPA CELUP AIR KOTOR	18
10	POMPA SPA	19
11	POMPA KOLAM RENANG	20
12	SUBMERSIBLE DEEP WELL PUMP	21 - 30

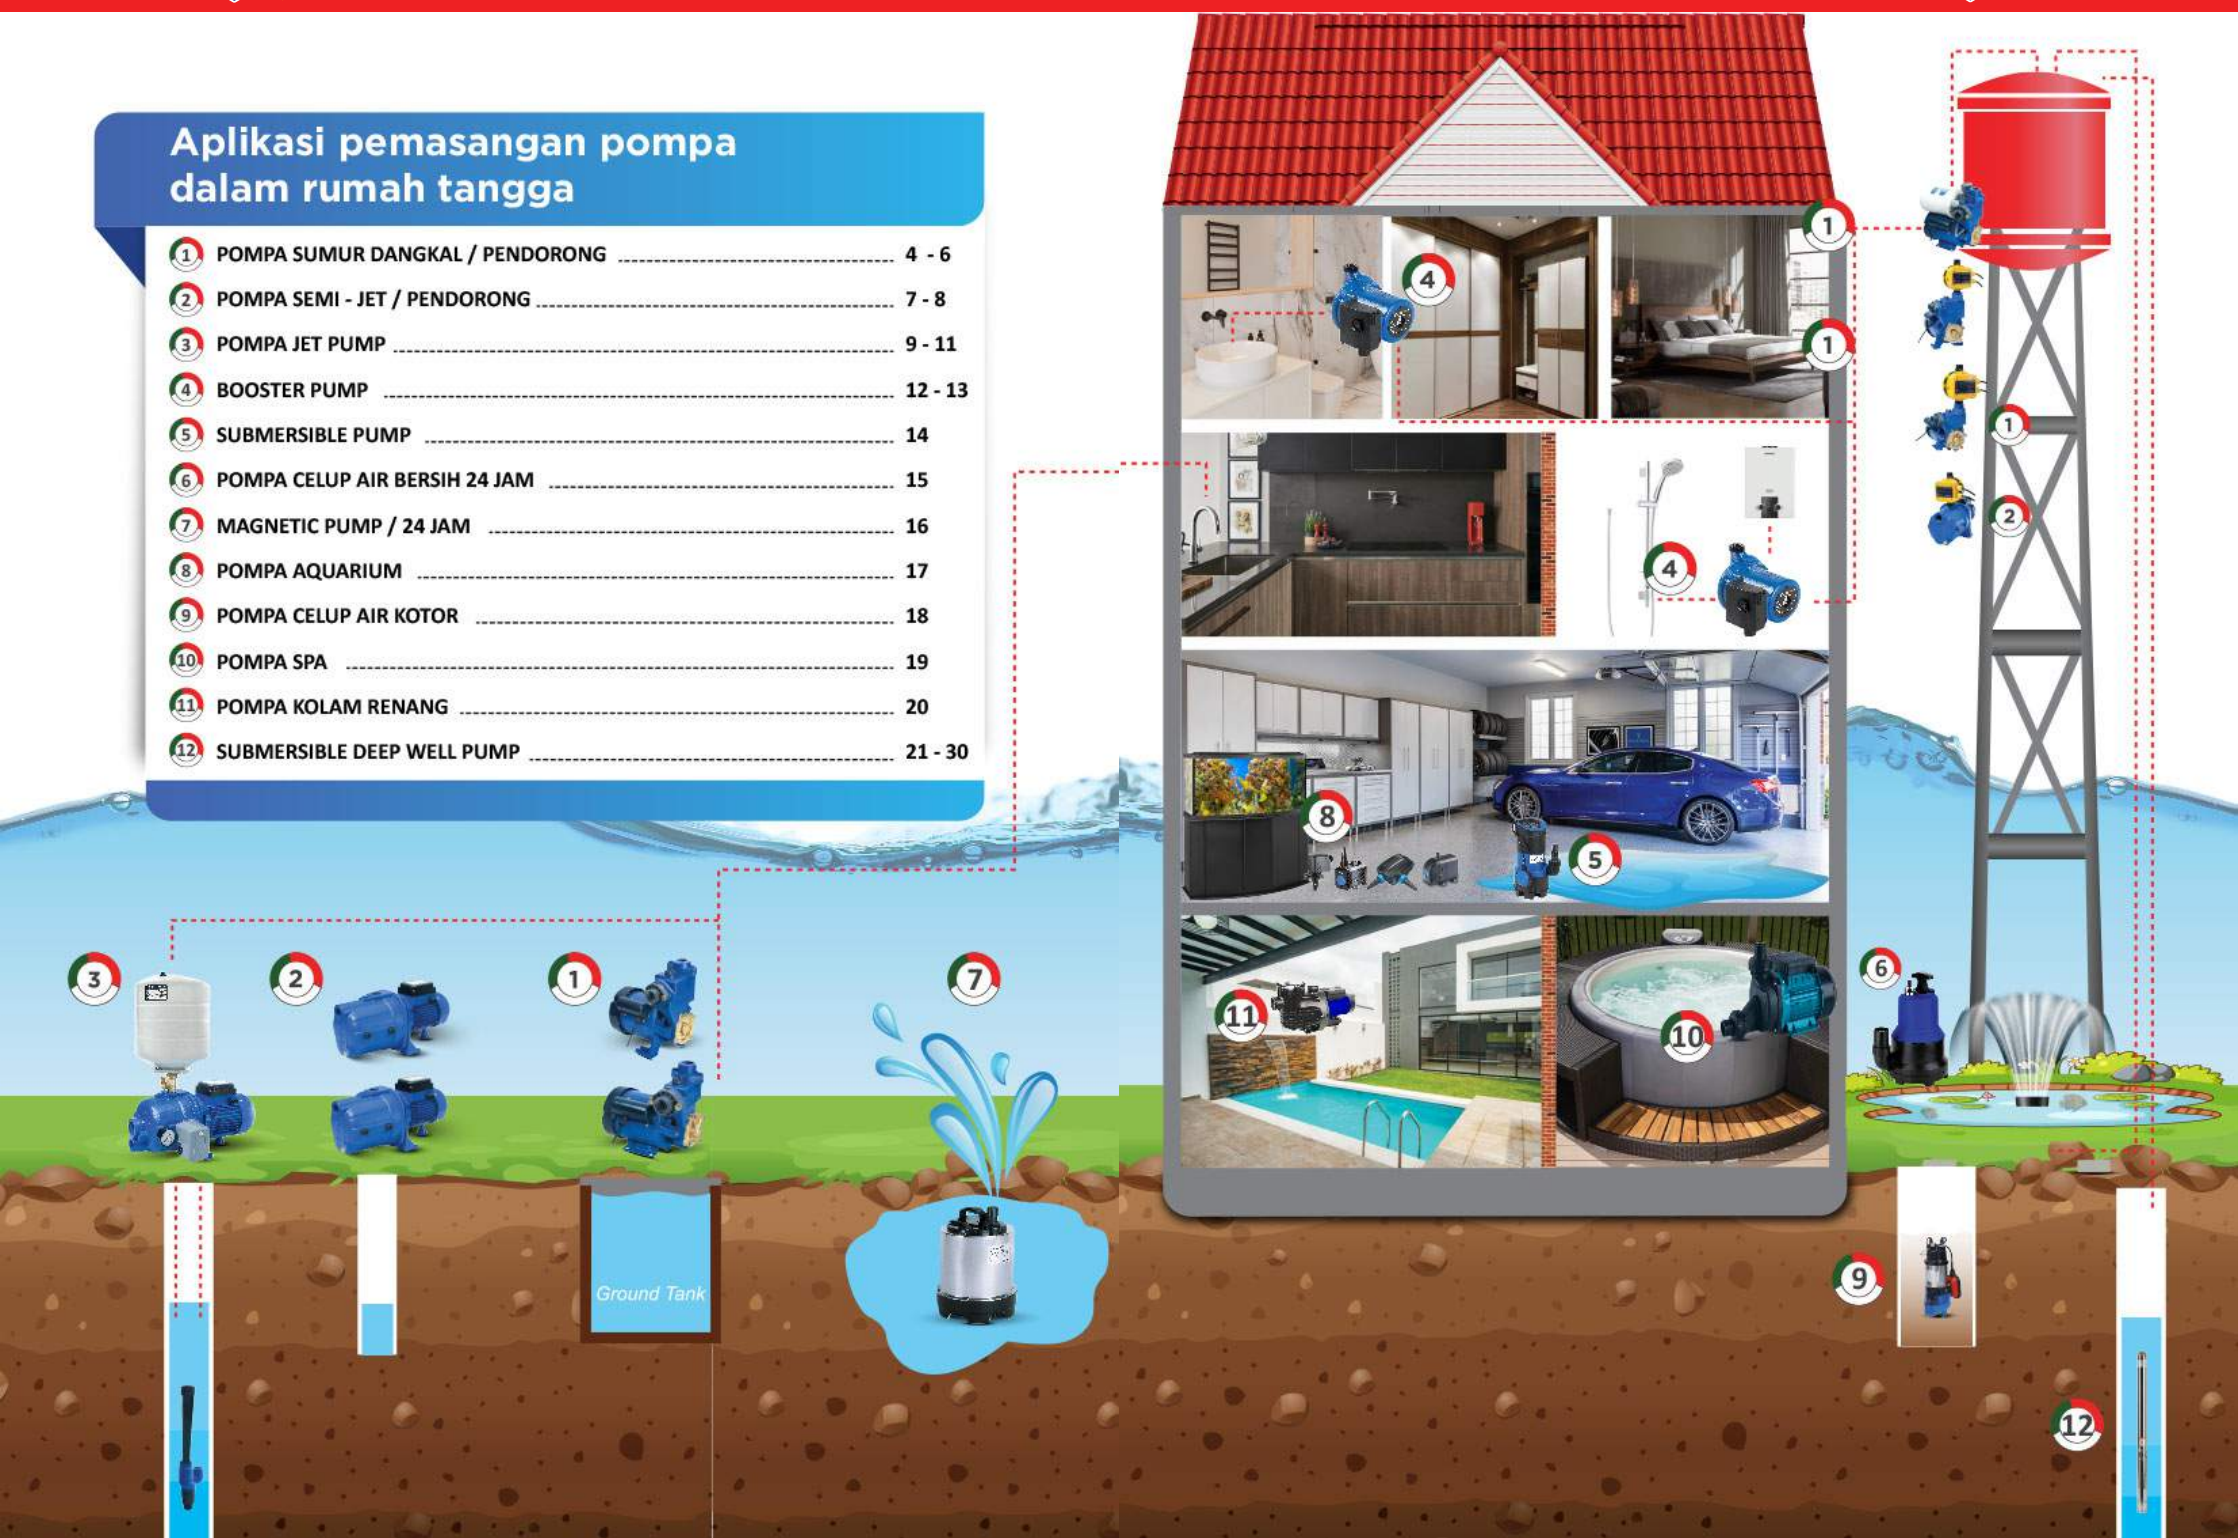

Pompa Sumur Dangkal / Pendorong



PD - 128 A



RECOMMENDED APPLICATION / Aplikasi



Rumah Tangga

FEATURES / Fitur

- PD - 128 A : Pompa Pendorong
- PD - 128 NA : Pompa Air Sumur Dangkal

SPECIFICATION / Spesifikasi

YORK [®] *Italy*
Pompa Air Berkualitas & Terpercaya



MODEL : PD - 128 NA			
Tegangan	220 V	Pipa Hisap	1" (25 mm)
Frekuensi	50 Hz	Pipa Dorong	1" (25 mm)
Daya Keluaran	1.1 A	Daya Hisap Maks	9 m
Kapasitor	8 uf / 450 v	Tinggi Dorong	30 m
IP	IPx4	Tinggi Total Maks	39 m
Ppm	2850	Kapasitas Maks	30 L / Min
Motor Dilengkapi Thermal Protector		Temp. Air Maks	40 °C



PD - 128 NA

Pompa Pendorong



PD - 130 A



RECOMMENDED APPLICATION / Aplikasi



Rumah Tangga

FEATURES / Fitur

- PD - 130 A : Pompa Pendorong

SPECIFICATION / Spesifikasi

YORK [®] *Italy*
Pompa Air Berkualitas & Terpercaya



MODEL : PD - 130 A			
Tegangan	220 V	Pipa Hisap	1" (25 mm)
Frekuensi	50 Hz	Pipa Dorong	1" (25 mm)
Daya Keluaran	1.1 A	Daya Hisap Maks	9 m
Kapasitor	8 uf / 450 v	Tinggi Dorong	35 m
IP	IPx4	Tinggi Total Maks	44 m
Ppm	2850	Kapasitas Maks	35 L / Min
Motor Dilengkapi Thermal Protector		Temp. Air Maks	40 °C
		Otomatis Pompa Air	ON : 1.1 kg/m2 OFF : 1.8 kg/cm2



Pompa Sumur Dangkal / Pendorong**PD - 225 A****RECOMMENDED APPLICATION / Aplikasi**

Rumah Tangga

FEATURES / Fitur

- PD - 225 A : Pompa Pendorong
- PD - 225 NA : Pompa Air Sumur Dangkal

SPECIFICATION / Spesifikasi

YORK® Italy
Pompa Air Berkualitas & Terpercaya



MODEL : PD - 225 NA			
Tegangan	220 V	Pipa Hisap	1" (25 mm)
Frekuensi	50 Hz	Pipa Dorong	1" (25 mm)
Daya Keluaran	1.7 A	Daya Hisap Maks	9 m
Kapasitor	20 µf / 450 v	Tinggi Dorong	40 m
IP	IPx4	Tinggi Total Maks	49 m
PPM	2850	Kapasitas Maks	45 L / Min
Motor Dilengkapi Thermal Protector		Temp. Air Maks	40 °C

**PD - 225 NA****Pompa Semi Jet / Pendorong****PS - 100 A****RECOMMENDED APPLICATION / Aplikasi**

Rumah Tangga

FEATURES / Fitur

- PS - 100 A : Pompa Pendorong
- PS - 100 NA : Pompa Semi Jet

SPECIFICATION / Spesifikasi

YORK® Italy
Pompa Air Berkualitas & Terpercaya



MODEL : PS - 100 NA			
Tegangan	220 V	Pipa Hisap	1" (25 mm)
Frekuensi	50 Hz	Pipa Dorong	1" (25 mm)
Daya Keluaran	1.7 A	Daya Hisap Maks	9 m
Kapasitor	10 µf / 450 v	Tinggi Dorong	35 m
IP	IPx4	Tinggi Total Maks	44 m
PPM	2850	Kapasitas Maks	40 L / Min
Motor Dilengkapi Thermal Protector		Temp. Air Maks	40 °C

**PS - 100 NA**

Pompa Semi Jet / Pendorong



PS - 250 A

RECOMMENDED APPLICATION / Aplikasi



Rumah Tangga

FEATURES / Fitur

- PS - 250 A : Pompa Pendorong
- PS - 250 NA : Pompa Semi Jet

GARANSI
3 TAHUN
MOTOR

SPECIFICATION / Spesifikasi

YORK® Italy
Pompa Air Berkualitas & Terpercaya



MODEL : PS - 250 NA			
Tegangan	220 V	Pipa Hisap	1" (25 mm)
Frekuensi	50 Hz	Pipa Dorong	1" (25 mm)
Daya Keluaran	2.5 A	Daya Hisap Maks	9 m
Kapasitor	12 µf / 450 v	Tinggi Dorong	45 m
IP	IPx4	Tinggi Total Maks	54 m
PPM	2850	Kapasitas Maks	45 L / Min
Motor Dilengkapi Thermal Protector		Temp. Air Maks	40 °C



PS - 250 NA

Pompa Jet Pump



JP - 255 Tangki 18 Lt

RECOMMENDED APPLICATION / Aplikasi



Rumah Tangga

FEATURES / Fitur

- JP - 255 : Pompa Sumur Dalam

GARANSI
3 TAHUN
MOTOR

SPECIFICATION / Spesifikasi

YORK® Italy
Pompa Air Berkualitas & Terpercaya



MODEL : JP - 255			
Tegangan	220 V	Pipa Hisap	1" x 1 1/4"
Frekuensi	50 Hz	Pipa Dorong	1" (25 mm)
Daya Keluaran	2.5 A	Tinggi Dorong	40 m
Kapasitor	12 µf / 450 v	Tinggi Total Maks	55 m
IP	IPx4	Kapasitas Maks	46 L / Min
PPM	2850	Temp. Air Maks	40 °C
Motor Dilengkapi Thermal Protector		Otomatis Pompa Air	ON : 1.4 kg/cm ² OFF : 2.8 kg/cm ²



JP - 255 Tanpa Tangki 18 Lt



Pompa Jet Pump



JP - 370 Tangki 18 Lt

RECOMMENDED APPLICATION / Aplikasi



Rumah Tangga

FEATURES / Fitur

- JP - 370 : Pompa Sumur Dalam

SPECIFICATION / Spesifikasi

YORK® Italy
Pompa Air Berkualitas & Terpercaya

SNI
(04-0202.2-41-2003(1)
B4T - LSPy

MODEL : JP - 370

Tegangan	220 V	Pipa Hisap	1" x 1 1/4"
Frekuensi	50 Hz	Pipa Dorong	1" (25 mm)
Daya Keluaran	3.4 A	Tinggi Dorong	47 m
Kapasitor	16 µf / 450 v	Tinggi Total Maks	65 m
IP	IPx4	Kapasitas Maks	47 L / Min
Ppm	2850	Temp. Air Maks	40 °C
Motor Dilengkapi Thermal Protector		Otomatis Pompa Air	ON : 1.4 kg/cm2 OFF : 2.8 kg/cm2



JP - 370 Tanpa Tangki 18 Lt

Pompa Jet Pump



JP - 500 Tangki 18 Lt

RECOMMENDED APPLICATION / Aplikasi



Rumah Tangga

FEATURES / Fitur

- JP - 500 : Pompa Sumur Dalam

SPECIFICATION / Spesifikasi

YORK® Italy
Pompa Air Berkualitas & Terpercaya

SNI
(04-0202.2-41-2003(1)
B4T - LSPy

MODEL : JP - 500

Tegangan	220 V	Pipa Hisap	1" x 1 1/4"
Frekuensi	50 Hz	Pipa Dorong	1" (25 mm)
Daya Keluaran	5 A	Tinggi Dorong	73 m
Kapasitor	31.5 µf / 450 v	Tinggi Total Maks	98 m
IP	IPx4	Kapasitas Maks	47 L / Min
Ppm	2850	Temp. Air Maks	40 °C
Motor Dilengkapi Thermal Protector		Otomatis Pompa Air	ON : 1.4 kg/cm2 OFF : 2.8 kg/cm2



JP - 500 Tanpa Tangki 18 Lt



Booster Pump

RECOMMENDED APPLICATIONS / Aplikasi



Instalasi



Instalasi

FEATURES / Fitur

- Struktur Pompa Terlindung dari Masalah Kebocoran
- Hemat Listrik
- Suara Halus
- Mudah Perawatannya

SPECIFICATION / Spesifikasi

YORK® Italy
Pompa Air Berkualitas & Terpercaya

SNI
04-6292.2-41-2003(1)
B4T - LSPy

SPESIFIKASI / MODEL	YRK - B 245 / 12	YRK - B 150 / 10
Tegangan	220 V / 50 Hz	220 V / 50 Hz
Daya Keluaran	145 / 220 / 245 W	150 W
Daya Pancar Maks.	7 / 11 / 12 m	9 m/Min
Kapasitas Maks.	22 / 32 / 52 L/Min	23 L/Min
Pipa Pancar	Ø 1"	Ø 3/4"

YRK - B 245 / 12

YRK - B 150 / 10

Booster Pump

RECOMMENDED APPLICATIONS / Aplikasi



Instalasi



Instalasi

FEATURES / Fitur

- Struktur Pompa Terlindung dari Masalah Kebocoran
- Hemat Listrik
- Suara Halus
- Mudah Perawatannya

SPECIFICATION / Spesifikasi

YORK® Italy
Pompa Air Berkualitas & Terpercaya

SNI
04-6292.2-41-2003(1)
B4T - LSPy

MODEL	YRK - 250 A
Tegangan Listrik (Volt)	220V / 50Hz
Arus Listrik (Ampere)	1.7
Kapasitas Maksimum (Liter/menit)	35
Daya Dorong / Tinggi Total Maksimum (Meter)	30
Diameter Pipa (Inch)	1
Tekanan Kerja Minimal Flow Switch (Bar)	0.2
Temperatur Air Maks.	40° C (Continuous) 70° C (Intermittent)

YRK - 250 A

YRK - 250 A

GARANSI
3 TAHUN
MOTOR



Submersible Pump

RECOMMENDED APPLICATIONS / Aplikasi



Pengurasan
Tangki



Pengeringan
Genangan Hujan



- YRK - 130 A (3in1)
- YRK - 250 A (3in1)

SPECIFICATION / Spesifikasi

YORK® Italy
Pompa Air Berkualitas & Terpercaya



MODEL	YRK - 130 A (3in1)	YRK - 250 A (3in1)
Tegangan	220V 50Hz	220V 50Hz
Daya Keluar	130W	250W
Daya Pancar Maks.	5m	9m
Kapasitas Maks.	2000 / 3500 / 7500 L/jam	3000 / 4500 / 13.000 L/jam
Max Grain Size	1 / 8 / 35 mm	1 / 8 / 35 mm
Pipa Pancar	Ø1"	Ø1"

FEATURES / Fitur

- Suitable for Fresh Water
- Suitable for Pumping & Draining
- Inbuilt with Overload Protector to Protect Motor



YRK BL - 2512

SPECIFICATION / Spesifikasi

MODEL	Tegangan	Daya Keluar	Daya Pancar Maks.	Kapasitas Maks.	Max Grain Size	Pipa Pancar
YRK BL - 2512	DC 12V	2.8m	3600L/H	10m	-	Ø1"

Pompa Celup Air Bersih

RECOMMENDED APPLICATIONS / Aplikasi



Sirkulasi
Kolam Ikan



Sirkulasi
Kolam Taman



YRK - 80

SPECIFICATION / Spesifikasi

MODEL	POWER	H-MAX	OUTPUT	CABLE	HOSE ADAPTER	VOLT
YRK - 80	80W	3.5m	4500L/H	10m	3/4" ~ 1 1/4"	220-240V / 50Hz
YRK - 145	145W	5.0m	6500L/H	10m	3/4" ~ 1 1/4"	220-240V / 50Hz
YRK - 260	260W	7.0m	12000L/H	10m	1" ~ 2"	220-240V / 50Hz

FEATURES / Fitur

- Suitable for Fresh Water
- Suitable for Pumping




YRK - 145



YRK - 260

**24 Jam
NON STOP**



Magnetic Pump



SP - 2400

SP - 3200



SP - 4500

SP - 9000



SP - 12000

RECOMMENDED APPLICATIONS / Aplikasi

Sirkulasi
Kolam IkanSirkulasi
Aquarium

Air Terjun

Sirkulasi
Kolam Taman

FEATURES / Fitur

- Suitable for Fresh Water
- Suitable for Pumping & Draining

SPECIFICATION / Spesifikasi

YORK® Italy
Pompa Air Berkualitas & Terpercaya



SPEKIFIKASI / MODEL	SP - 2400	SP - 3200	SP - 4500	SP - 9000	SP - 12000
Tegangan	220V / 50Hz	220V / 50Hz	220V / 50Hz	220V / 50Hz	220V / 50Hz
Daya Keluaran	60W	80W	110W	240W	360W
Daya Pancar Maks.	2.6m	3.5m	4.5m	6.1m	7.5m
Kapasitas Maks.	2400 L/jam	3200 L/jam	4500 L/jam	8500 L/jam	12000 L/jam
Pipa Pancar	Ø 0.4" ; 0.6"	Ø 0.4" ; 0.6"	Ø 0.6" ; 1"	Ø 1 1/4"	Ø 1 1/2"

Pompa Aquarium



SP SERIES



HJ SERIES



CTP SERIES



CTF SERIES

SPECIFICATION / Spesifikasi

MODEL	POWER	H-MAX	OUTPUT	CABLE	VOLT
SP - 800	8W	1.0m	600L/H	1.5m	220-240V / 50Hz
SP - 1600	16W	1.3m	1000L/H	1.5m	220-240V / 50Hz
SP - 2200	22W	1.6m	1200L/H	1.5m	220-240V / 50Hz
SP - 3500	35W	2.5m	1600L/H	1.5m	220-240V / 50Hz
HJ - 600	8W	1.3m	1600L/H	1.5m	220-240V / 50Hz
HJ - 1100	20W	1.5m	4500L/H	1.5m	220-240V / 50Hz
HJ - 1500	25W	1.8m	6000L/H	1.5m	220-240V / 50Hz
HJ - 2200	35W	2.0m	2000L/H	1.5m	220-240V / 50Hz
HJ - 2500	45W	2.7m	2500L/H	2.5m	220-240V / 50Hz
HJ - 3000	55W	3.0m	3000L/H	2.5m	220-240V / 50Hz
CTP - 4800	30W	4.0m	4500L/H	2.5m	220-240V / 50Hz
CTP - 6000	40W	4.2m	6000L/H	5m	220-240V / 50Hz
CTP - 7000	50W	4.2m	7000L/H	5m	220-240V / 50Hz
CTP - 8000	70W	5.6m	8000L/H	5m	220-240V / 50Hz
CTF - 3800 B	20W	2.8m	3600L/H	10m	220-240V / 50Hz
CTF - 6000 B	40W	4.2m	6000L/H	10m	220-240V / 50Hz
CTF - 8000 B	70W	5.6m	8000L/H	10m	220-240V / 50Hz
CTF - 12000 B	100W	6.5m	12000L/H	10m	220-240V / 50Hz
CTF - 16000 B	140W	7.5m	16000L/H	10m	220-240V / 50Hz

IP X8

Max: 35°C



Pompa Celup Air Kotor / Sewage Pump



V180 (F)



V250 (F)



V450 (F)



V750 (F)



V1100 (F)


STRUCTURAL CHARACTERISTIC PUMP

- Pump Body : Cast Iron & Stainless Steel
- Impeller : Cast Iron
- Mechanical Seal : Ceramic
- Float Switch : With

MOTOR

- Single Phase
- Heavy Duty Continous Work
- Shaft : Stainless Steel
- Insulation : Class B / Class F
- Protection : IP68
- Water Cooling : Water

PERFORMANCE CURVE AT n=2850 R/min

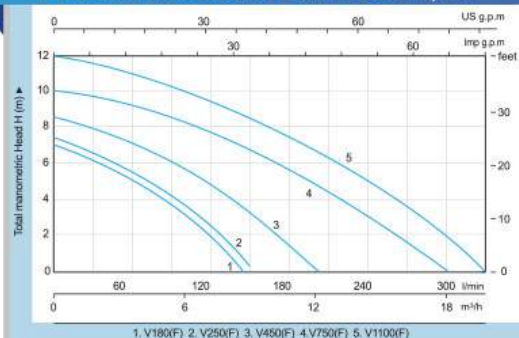

PERFORMANCE SPECIFICATIONS

NO.	MODEL	POWER KW	HP	VOLTAGE V	CAPACITY L/Min	MAX HEAD M	OUTLET DIAMETER MM	DIMENSIONS CM	G.W KG
1	V180(F)	0.18	0.25	220	133	7.0	40	18.5x18.0x36.0	16
2	V250(F)	0.25	0.33	220	150	7.5	40	18.5x18.0x36.0	20
3	V450(F)	0.45	0.6	220	200	8.5	50	25.5x19.5x49.5	9.5
4	V750(F)	0.75	1.0	220	300	10	50	25.5x19.5x53.5	12.5
5	V1100(F)	1.1	1.5	220	330	12	50	27.5x22.5x55.5	11.5

Other voltages and frequencies available on request.

Pompa SPA / Whirlpool



SPA 500



SPA 600



SPA 800



SPA 900




SPA 1100



SPA 1300

SPECIFICATION / Spesifikasi

Model	Voltage Freq	Power HP	Power KW	Size mm	Impeller	Shaft	Cable	Hmax m	Qmax L/min
SPA500	220V/50HZ	0.5	0.4	1" x 1"	ppo	304# S.S SHAFT	25cm outlet	8	300
SPA600	220V/50HZ	0.8	0.6	1" x 1"	ppo	304# S.S SHAFT	25cm outlet	9	320
SPA800	220V/50HZ	1	0.8	1" x 1"	ppo	304# S.S SHAFT	25cm outlet	10	330
SPA900	220V/50HZ	1.2	0.9	1" x 1"	ppo	304# S.S SHAFT	25cm outlet	11	350
SPA1100	220V/50HZ	1.5	1.1	1" x 1"	ppo	304# S.S SHAFT	25cm outlet	11	400
SPA1300	220V/50HZ	1.7	1.3	1" x 1"	ppo	304# S.S SHAFT	25cm outlet	12	430



Pompa Kolam Renang / Pool Pump



SWIM 370



SWIM 550



SWIM 750



SWIM 900



SWIM 1100



SWIM 1500



SWIM 2200

SPECIFICATION / Spesifikasi

Model	Voltage	Power		Size mm	Impeller	Shaft	Cable	Hmax	Qmax
	Freq	HP	KW					m	L/min
SWIM 370	220V/50HZ	0,5	0,37	2" x 2"	ppo	304# S.S SHAFT	2m EU-plug	10	260
SWIM 550	220V/50HZ	0,75	0,55	2" x 2"	ppo	304# S.S SHAFT	2m EU-plug	12	280
SWIM 750	220V/50HZ	1	0,75	2" x 2"	ppo	304# S.S SHAFT	2m EU-plug	13	300
SWIM 900	220V/50HZ	1,2	0,9	2" x 2"	ppo	304# S.S SHAFT	2m EU-plug	15	310
SWIM 1100	220V/50HZ	1,5	1,1	2" x 2"	ppo	304# S.S SHAFT	2m EU-plug	16,5	410
SWIM 1500	220V/50HZ	2	1,5	2" x 2"	ppo	304# S.S SHAFT	2m EU-plug	18,5	440
SWIM 2200	220V/50HZ	3	2,2	2" x 2"	ppo	304# S.S SHAFT	2m EU-plug	21	445

Submersible Deep Well Pump

Overheat Protection (Perlindungan Overheat)

Dilengkapi dengan Overload Protector, pompa kami akan otomatis berhenti jika motor kepanasan dikarenakan ampere naik tidak normal.



100% Copper (100% Kawat Tembaga)

Kami hanya menggunakan bahan terbaik untuk memproduksi motor kami, untuk menjamin kinerja terbaik, efisien dan masa pakai produk kami.



100% Stainless

Casing Motor & Pump Body terbuat dari Stainless terbaik, memastikan integritas dan masa pakai semua produk kami.




Let's Go Swimming

Produk Pompa kami dilengkapi dengan IP 68, (Air dan Debu) tidak dapat masuk kedalam motor.




**GARANSI
1 TAHUN
MOTOR**



Submersible Deep Well Pump 2 SYK 0.7 M³ (P)

TITLE



FITUR

1. Hemat Listrik
2. Semburan Deras
3. Voltage 160V - 240V
4. Bebas Perawatan
5. Tidak Berisik


APLIKASI



COMPONENTS & MATERIAL

Components	Material
Pump external casing	AISI 304 SS
Delivery casing	QCast-Cu ASTM C85500 @ AISI 304 SS
Suction lantern	QCast-Cu ASTM C85500 @ AISI 304 SS
Diffuser	Plastic PC
Impeller	Plastic POM
Shaft	Q/AISI 316 SS @ AISI 304 SS
Shaft coupling	Q/AISI 316 SS @ AISI 304 SS
Wear ring	AISI 304 SS & Ceramic
Motor external casing	AISI 304 SS
Top cover	Cast-Cu ASTM C85500
Bottom support	AISI 304 SS
Mechanical seal	Special seal for deep well (Graphite-Ceramic/TC)
Shaft	AISI 303 SS-ASTM 1045 / 5140
Bearing	NSK
Seal lubricant oil	Oil for food machinery and pharmaceutical use.

PERFORMANCE CHART AT n=2850 1/min

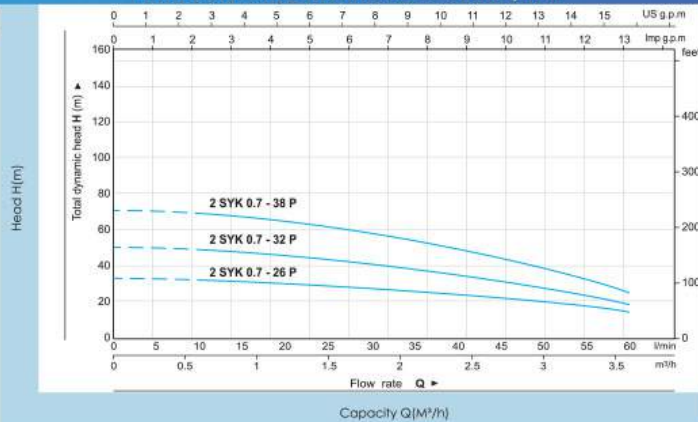


PERFORMANCE Data 50Hz

MODEL	P2	Pipa Diameter Output	DELIVERY	n=2850 1/min
1-160V - 240V	KW	HP	Q m³/h	0 0.3 0.6 0.9 1.2 1.5 1.8 2.1 2.4 2.7 3.0 3.3 3.6
2 SYK 0.7 - 26 P	0.18	0.25	0.75"	32 30 28 26 20 24 21 17 13 8
2 SYK 0.7 - 32 P	0.25	0.33	0.75"	50 46 41 40 39 37 36 33 31 27 23 18 13
2 SYK 0.7 - 38 P	0.37	0.5	0.75"	63 62 61 60 58 56 53 50 46 41 35 27 20

Submersible Deep Well Pump 3 SYK 1.8 - 2.5 M³ (P)

TITLE



FITUR

1. Hemat Listrik
2. Semburan Deras
3. Voltage 160V - 240V
4. Bebas Perawatan
5. Tidak Berisik


APLIKASI



COMPONENTS & MATERIAL

Components	Material
Pump external casing	AISI 304 SS
Delivery casing	QCast-Cu ASTM C85500 @ AISI 304 SS
Suction lantern	QCast-Cu ASTM C85500 @ AISI 304 SS
Diffuser	Plastic PC
Impeller	Plastic POM
Shaft	Q/AISI 316 SS @ AISI 304 SS
Shaft coupling	Q/AISI 316 SS @ AISI 304 SS
Wear ring	AISI 304 SS & Ceramic
Motor external casing	AISI 304 SS
Top cover	Cast-Cu ASTM C85500
Bottom support	AISI 304 SS
Mechanical seal	Special seal for deep well (Graphite-Ceramic/TC)
Shaft	AISI 303 SS-ASTM 1045 / 5140
Bearing	NSK
Seal lubricant oil	Oil for food machinery and pharmaceutical use.

PERFORMANCE CHART AT n=2850 1/min

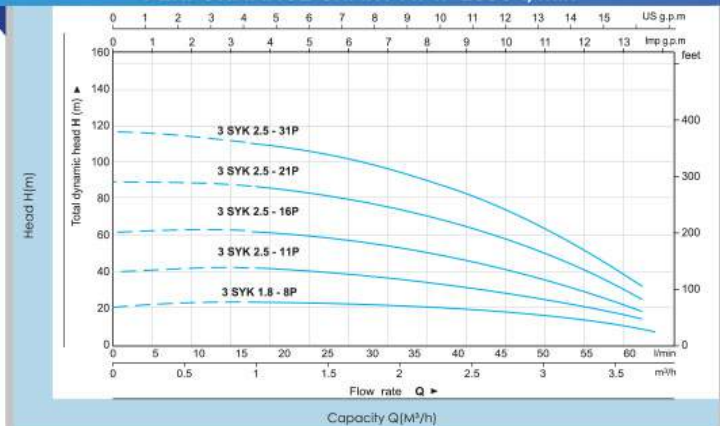


PERFORMANCE Data 50Hz

MODEL	P2	Pipa Diameter Output	DELIVERY	n=2850 1/min
1-160V - 240V	KW	HP	Q m³/h	0 0.3 0.6 0.9 1.2 1.5 1.8 2.1 2.4 2.7 3.0 3.3 3.6
3 SYK 1.8 - 8P	0.18	0.25	1"	26 25 24 22 20 19 18 17 13 8
3 SYK 2.5 - 11P	0.37	0.5	1"	43 42 41 40 39 37 36 33 31 27 23 18 13
3 SYK 2.5 - 16P	0.55	0.75	1"	63 62 61 60 58 56 53 50 46 41 35 27 20
3 SYK 2.5 - 21P	0.75	1	1"	84 83 82 80 78 74 71 67 61 54 46 37 27
3 SYK 2.5 - 31P	1.1	1.5	1"	117 116 114 112 109 104 100 93 86 76 65 51 37



Submersible Deep Well Pump 4 SYK 3 M³ (P)

TITLE



FITUR

1. Hemat Listrik
2. Semburan Deras
3. Voltage 160V - 240V
4. Bebas Perawatan
5. Tidak Berisik


APLIKASI



COMPONENTS & MATERIAL

Components	Material
Pump external casing	ASTM 304 ss
Delivery casing	ASTM 304 ss / Cast-Cu ASTM280
Suction lantern	ASTM 304 ss / Cast-Cu ASTM280
Stage casing	Plastic PC PPO
Impeller	ASTM 304 ss / Plastic POM
Shaft	ASTM 316 ss
Shaft coupling	ASTM 316 ss / ASTM 304 ss
Wear ring	ASTM 304 ss
Motor external casing	ASTM 304 ss
Former cover	Cast-Cu ASTM280 / G20 UNID007
Bottom support	ASTM 304 ss
Mechanical seal	Special seal for deep well (Carbon-SiC/TC)
Shaft	ASTM 316 ss-C1045
Bearing	NSK NTN (Japan)
Seal lubricant oil	Oil for food machinery and pharmaceutical use.

PERFORMANCE CHART AT n=2850 1/min

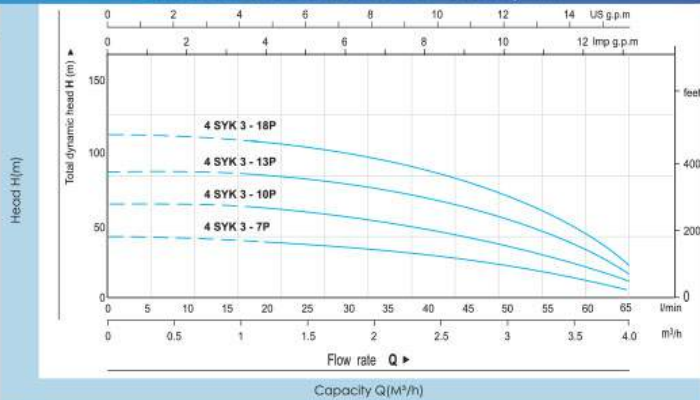


PERFORMANCE Data 50Hz

MODEL	P2	Pipa Diameter Output	DELIVERY	n=2850 1/min
1-160V-240V	KW	HP	Q m³/h	0 0.6 1.2 1.8 2.4 3.0 3.6 4.2 4.8
4 SYK 3 - 7P	0.37	0.5	1.25"	0 10 20 30 40 50 60 70 80
4 SYK 3 - 10P	0.55	0.75	1.25"	50 49 47 45 41 35 28 20 10
4 SYK 3 - 13P	0.75	1	1.25"	72 70 68 64 58 50 40 29 15
4 SYK 3 - 18P	1.1	1.5	1.25"	93 91 88 83 76 66 53 38 19
				129 126 122 115 105 91 73 52 27

Submersible Deep Well Pump 4 SYK 3 M³ (SS)

TITLE



FITUR

1. Hemat Listrik
2. Semburan Deras
3. Voltage 160V - 240V
4. Bebas Perawatan
5. Tidak Berisik


APLIKASI



COMPONENTS & MATERIAL

Components	Material
Pump external casing	ASTM 304 ss
Delivery casing	ASTM 304 ss / ASTM 316 ss
Suction lantern	ASTM 304 ss / ASTM 316 ss
Stage casing	ASTM 304 ss / ASTM 316 ss
Impeller	ASTM 304 ss / ASTM 316 ss
Shaft	ASTM 316 ss
Shaft coupling	ASTM 316 ss / ASTM 316 ss
Wear ring	Rubber
Motor external casing	ASTM 304 ss
Former cover	ASTM 420 ss
Bottom support	ASTM 420 ss
Mechanical seal	Special seal for deep well (Carbon-SiC/TC)
Shaft	ASTM 316 ss-C1045
Bearing	Oscillation pada type stainless/graphite
Seal lubricant oil	Oil for food machinery and pharmaceutical use.

PERFORMANCE CHART AT n=2850 1/min

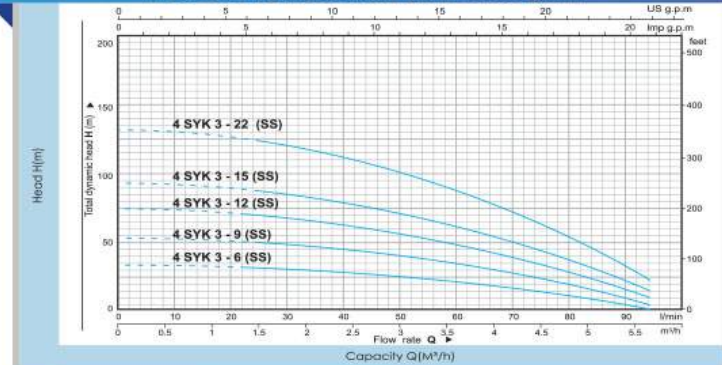


PERFORMANCE Data 50Hz

MODEL	P2	Pipa Diameter Output	DELIVERY	n=2850 1/min
1-160V-240V	KW	HP	Q m³/h	0 0.6 1.2 1.8 2.4 3.0 3.6 4.2
4 SYK 3 - 6 SS	0.37	0.5	1.25"	0 10 20 30 40 50 60 70
4 SYK 3 - 9 SS	0.55	0.75	1.25"	37 35 34 32 29 26 22 16
4 SYK 3 - 12 SS	0.75	1	1.25"	56 53 50 48 44 39 32 24
4 SYK 3 - 15 SS	1.1	1.5	1.25"	75 71 67 63 59 52 43 32
4 SYK 3 - 18 SS	1.5	2	1.25"	93 89 84 79 74 65 54 40
4 SYK 3 - 22 SS				137 130 123 116 108 95 79 59



Submersible Deep Well Pump 4 SYK 5 M³ (SS)

TITLE



FITUR

1. Hemat Listrik
2. Semburan Deras
3. Voltage 160V - 240V
4. Bebas Perawatan
5. Tidak Berisik


APLIKASI



COMPONENTS & MATERIAL

Components	Material
Pump external casing	AISI 304 ss
Delivery casing	① AISI 304 ss ② AISI 316 ss
Suction lantern	① AISI 304 ss ② AISI 316 ss
Stage casing	① AISI 304 ss ② AISI 316 ss
Impeller	① AISI 304 ss ② AISI 316 ss
Shaft	AISI 316 ss
Shaft coupling	① AISI 304 ss ② AISI 316 ss
Wear ring	Rubber
Motor external casing	AISI 304 ss
Former cover	AISI 420 ss
Bottom support	AISI 420 ss
Mechanical seal	Special seal for deep well (Carbon-SiC/TC)
Shaft	AISI 316 ss-C1045
Bearing	Oxidation grade type stainless/graphite
Seal lubricant oil	Oil for food machinery and pharmaceutical use.

PERFORMANCE CHART AT n=2850 1/min

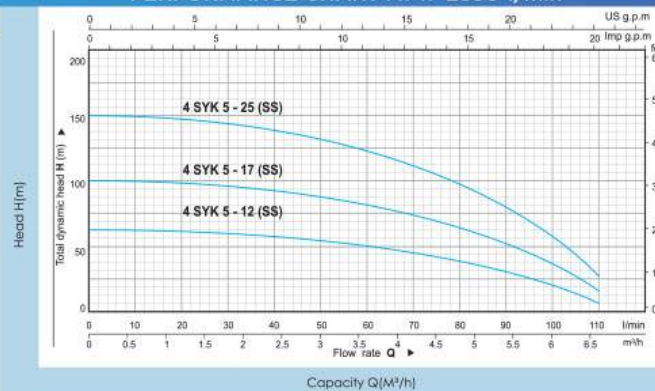


PERFORMANCE Data 50Hz

MODEL	P2	HP	Pipa Diameter Output	DELIVERY	n=2850 1/min
1-160V - 240V	KW				
4 SYK 5 - 12 SS	1.1	1.5	1.5"	Q m³/h	0 0.6 1.2 1.8 2.4 3.0 3.6 4.2 4.8 5.4 6.0 6.6
4 SYK 5 - 17 SS	1.5	2	1.5"	H(m)	76 74 71 68 66 63 60 56 51 44 36 27
4 SYK 5 - 25 SS	2.2	3	1.5"		108 104 100 96 93 89 85 79 72 62 51 38
					159 153 147 142 137 131 125 117 106 92 75 56

Submersible Deep Well Pump 4 SYK 8 M³ (SS)

TITLE



FITUR

1. Hemat Listrik
2. Semburan Deras
3. a. Voltage 160V - 240V
b. Voltage 380V - 415V
4. Bebas Perawatan
5. Tidak Berisik


APLIKASI



COMPONENTS & MATERIAL

Components	Material
Pump external casing	AISI 304 ss
Delivery casing	① AISI 304 ss ② AISI 316 ss
Suction lantern	① AISI 304 ss ② AISI 316 ss
Stage casing	① AISI 304 ss ② AISI 316 ss
Impeller	① AISI 304 ss ② AISI 316 ss
Shaft	AISI 316 ss
Shaft coupling	① AISI 304 ss ② AISI 316 ss
Wear ring	Rubber
Motor external casing	AISI 304 ss
Former cover	AISI 420 ss
Bottom support	AISI 420 ss
Mechanical seal	Special seal for deep well (Carbon-SiC/TC)
Shaft	AISI 316 ss-C1045
Bearing	Oxidation grade type stainless/graphite
Seal lubricant oil	Oil for food machinery and pharmaceutical use.

PERFORMANCE CHART AT n=2850 1/min

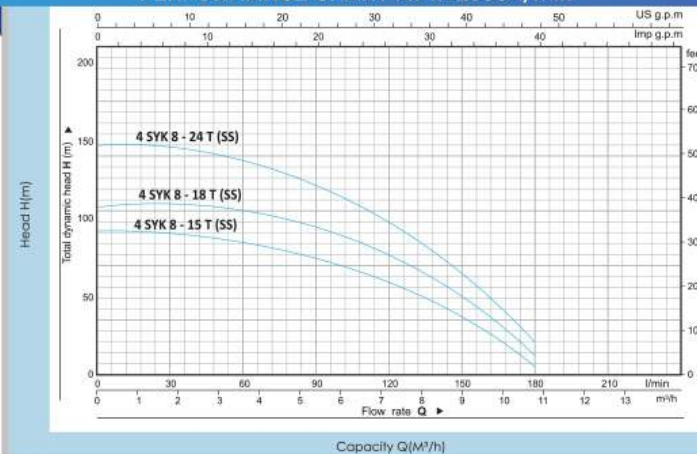


PERFORMANCE Data 50Hz

MODEL	P2	HP	Pipa Diameter Output	DELIVERY	n=2850 1/min
1-160V - 240V	KW				
4 SYK 8 - 15 SS	2.2	3	2"	Q m³/h	0 1.2 2.4 3.6 4.8 6.0 7.2 8.4 9.6 10.8
4 SYK 8 - 15 T (SS)	2.2	3	2"	H(m)	90 84 79 75 72 69 66 60 52 43
4 SYK 8 - 18 T (SS)	3	4	2"		108 100 95 91 86 83 79 72 63 51
4 SYK 8 - 24 T (SS)	4	5.5	2"		144 134 126 121 115 110 105 96 84 69



Submersible Deep Well Pump 4 SYK 14 M³ (SS)

TITLE



FITUR

1. Hemat Listrik
2. Semburan Deras
3. a. Voltage 160V - 240V
b. Voltage 380V - 415V
4. Bebas Perawatan
5. Tidak Berisik


APLIKASI



COMPONENTS & MATERIAL

Components	Material
Pump external casing	AISI 304 ss
Delivery casing	① AISI 304 ss ② AISI 316 ss
Suction lantern	① AISI 304 ss ② AISI 316 ss
Stage casing	① AISI 304 ss ② AISI 316 ss
Impeller	① AISI 304 ss ② AISI 316 ss
Shaft	AISI 316 ss
Shaft coupling	① AISI 304 ss ② AISI 316 ss
Wear ring	Rubber
Motor external casing	AISI 304 ss
Former cover	AISI 420 ss
Bottom support	AISI 420 ss
Mechanical seal	Special seal for deep well (Carbon-SiC/TC)
Shaft	AISI 316 ss-C1045
Bearing	Oscillation pads type stainless/graphite
Seal lubricant oil	Oil for food machinery and pharmaceutical use.

PERFORMANCE CHART AT n=2850 1/min

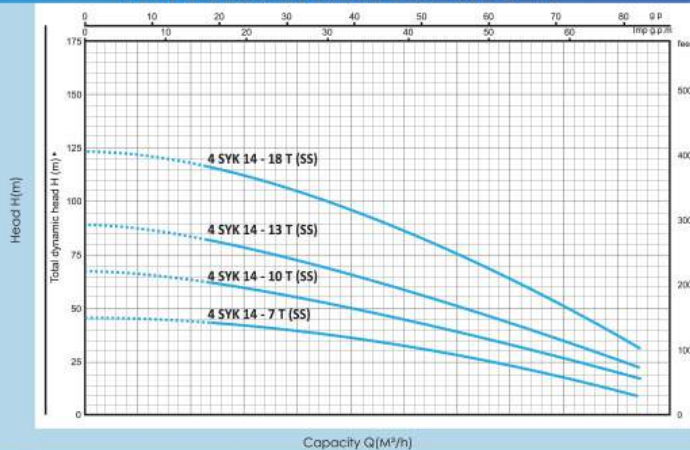


PERFORMANCE Data 50Hz

MODEL	P2	Pipa Diameter Output	DELIVERY	n=2850 1/min
1~ 220V - 240V	3~ 380V - 415V	KW HP	Q m³/h l/min	0 1.8 3.6 5.4 7.2 9.0 10.8 12.6 14.4 16.2 18
4 SYK 14 - 7 (SS)	2.2 3	2"	H(m)	0 30 60 90 120 150 180 210 240 270 300
4 SYK 14 - 10 (SS)	3 4	2"		48 47 45 43 41 40 38 34 30 24 16
4 SYK 14 - 13 (SS)	4 5.5	2"		69 67 64 61 59 57 54 49 42 34 23
4 SYK 14 - 18 (SS)	5.5 7.5	2"		89 87 83 80 77 74 70 64 55 45 30
				124 121 114 110 107 102 97 89 76 62 41

Submersible Deep Well Pump 6 SYK 17 M³ (SS)

TITLE



FITUR

1. Hemat Listrik
2. Semburan Deras
3. Voltage 380V - 415V
4. Bebas Perawatan
5. Tidak Berisik


APLIKASI



COMPONENTS & MATERIAL

Components	Material
Pump external casing	AISI 304 ss
Delivery casing	① AISI 304 ss ② AISI 316 ss
Suction lantern	① AISI 304 ss ② AISI 316 ss
Stage casing	① AISI 304 ss ② AISI 316 ss
Impeller	① AISI 304 ss ② AISI 316 ss
Shaft	AISI 316 ss
Shaft coupling	① AISI 304 ss ② AISI 316 ss
Wear ring	Rubber
Motor external casing	AISI 304 ss
Former cover	AISI 420 ss
Bottom support	AISI 420 ss
Mechanical seal	Special seal for deep well (Carbon-SiC/TC)
Shaft	AISI 316 ss-C1045
Bearing	Oscillation pads type stainless/graphite
Seal lubricant oil	Oil for food machinery and pharmaceutical use.

PERFORMANCE CHART AT n=2850 1/min

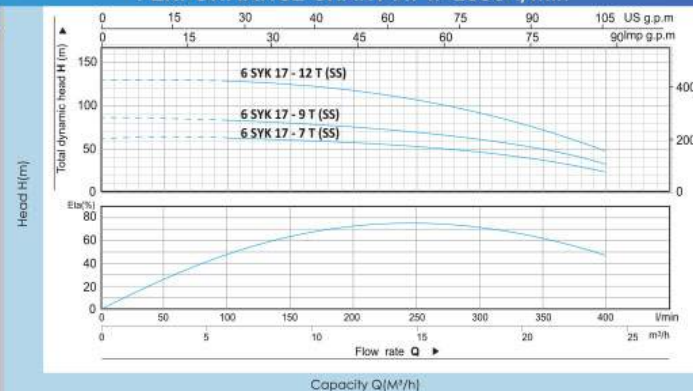


PERFORMANCE Data 50Hz

MODEL	P2	Pipa Diameter Output	DELIVERY	n=2850 1/min
3~ 380V - 415V	KW HP	Q m³/h l/min	H(m)	0 3 6 9 12 15 18 21 24
6 SYK 17 - 7 T (SS)	4 5.5	3"		0 50 100 150 200 250 300 350 400
6 SYK 17 - 9 T (SS)	5.5 7.5	3"		76 75 74 71 67 60 52 41 29
6 SYK 17 - 12 T (SS)	7.5 10	3"		87 86 84 82 76 69 60 47 33
				130 128 127 133 115 104 89 71 49



Submersible Deep Well Pump 6 SYK 30 M³ (SS)Submersible Deep Well Pump 3 SJP 3M³ (P)

TITLE



FITUR

1. Hemat Listrik
2. Semburan Deras
3. Voltage 380V - 415V
4. Bebas Perawatan
5. Tidak Berisik


APLIKASI



COMPONENTS & MATERIAL

Components	Material
Pump external casing	AISI 304 ss
Delivery casing	① AISI 304 ss ② AISI 316 ss
Suction lantern	① AISI 304 ss ② AISI 316 ss
Stage casing	① AISI 304 ss ② AISI 316 ss
Impeller	① AISI 304 ss ② AISI 316 ss
Shaft	AISI 316 ss
Shaft coupling	① AISI 304 ss ② AISI 316 ss
Wear ring	Rubber
Motor external casing	AISI 304 ss
Former cover	AISI 420 ss
Bottom support	AISI 420 ss
Mechanical seal	Special seal for deep well (Carbon-SiC/TC)
Shaft	AISI 316 ex-C1045
Bearing	Oscillation pada type stainless/graphite
Seal lubricant oil	Oil for food machinery and pharmaceutical use.


PERFORMANCE CHART AT n=2850 1/min

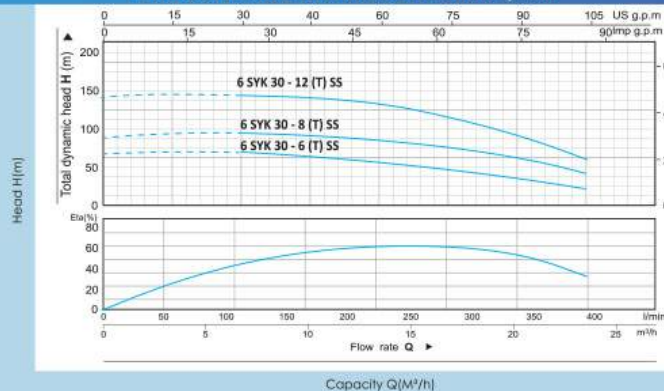

PERFORMANCE Data 50Hz

MODEL	P2	DELIVERY	n=2850 1/min
3-380V - 415V	KW HP	Q m³/h l/min	Q m³/h l/min
6 SYK 30 - 6 (T) SS	5.5 7.5	3"	0 100 200 300 400 500 600 700
6 SYK 30 - 8 (T) SS	7.5 10	3"	70 69 65 60 56 49 38 25
6 SYK 30 - 12 (T) SS	11 15	3"	94 91 86 81 75 65 51 33
		H(m)	140 137 129 121 113 98 76 50

TITLE



FITUR

1. Hemat Listrik
2. Semburan Deras
3. Voltage 160V - 240V
4. Bebas Perawatan
5. Tidak Berisik


APLIKASI



COMPONENTS & MATERIAL

Components	Material
Pump external casing	AISI 201 SS
Delivery casing	① Cast-iron ② Cast-Cu ASTM C8890 ③ AISI 304 SS
Suction lantern	① Cast-iron ② Cast-Cu ASTM C8890 ③ AISI 304 SS
Impeller	Plastic POM
Shaft	AISI 410S
Shaft coupling	AISI 205 SS
Wear ring	AISI 201 SS
Motor external casing	AISI 201 SS
Top choke	Cast-iron
Bottom support	AISI 430 SS
Mechanical seal	Special seal for deep well (Graphite-Ceramic)
Shaft	AISI 201 SS-ASTM 1045-5140
Bearing	Oil
Seal lubricant oil	Oil for food machinery and pharmaceutical use.

PERFORMANCE CHART AT n=2850 1/min

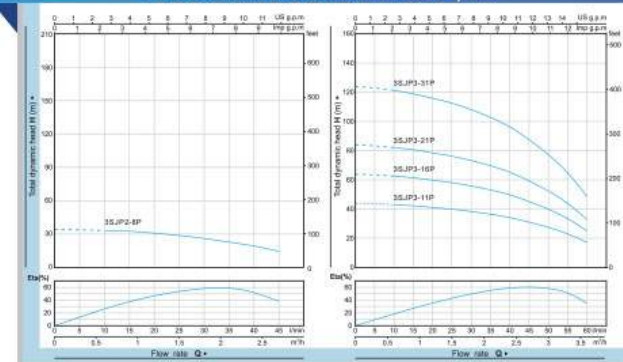


PERFORMANCE Data 50Hz

MODEL	P2	DELIVERY	n=2850 1/min
1-220V - 240V	KW HP	Q m³/h l/min	Q m³/h l/min
3 SJP - 8 P	0.18 0.25	H(m)	0 0.3 0.6 0.9 1.2 1.5 1.8 2.1 2.4 2.7
			0 5 10 15 20 25 30 35 40 45
			34 34 33 33 31 29 26 23 19 14

PERFORMANCE Data 50Hz

MODEL	P2	DELIVERY	n=2850 1/min
1-220V - 240V	KW HP	Q m³/h l/min	Q m³/h l/min
3 SJP 3 - 11 P	0.37 0.5	H(m)	0 0.3 0.6 0.9 1.2 1.5 1.8 2.1 2.4 2.7 3.0 3.3 3.6
3 SJP 3 - 16 P	0.55 0.75		0 5 10 15 20 25 30 35 40 45 50 55 60
3 SJP 3 - 21 P	0.75 1		44 44 43 43 41 40 39 37 35 31 27 22 16
3 SJP 3 - 31 P	1.1 1.5		64 64 63 62 60 59 56 54 51 45 39 32 23
			85 84 83 81 79 77 74 70 67 60 52 43 31
			125 124 122 120 116 114 109 104 99 88 76 63 45



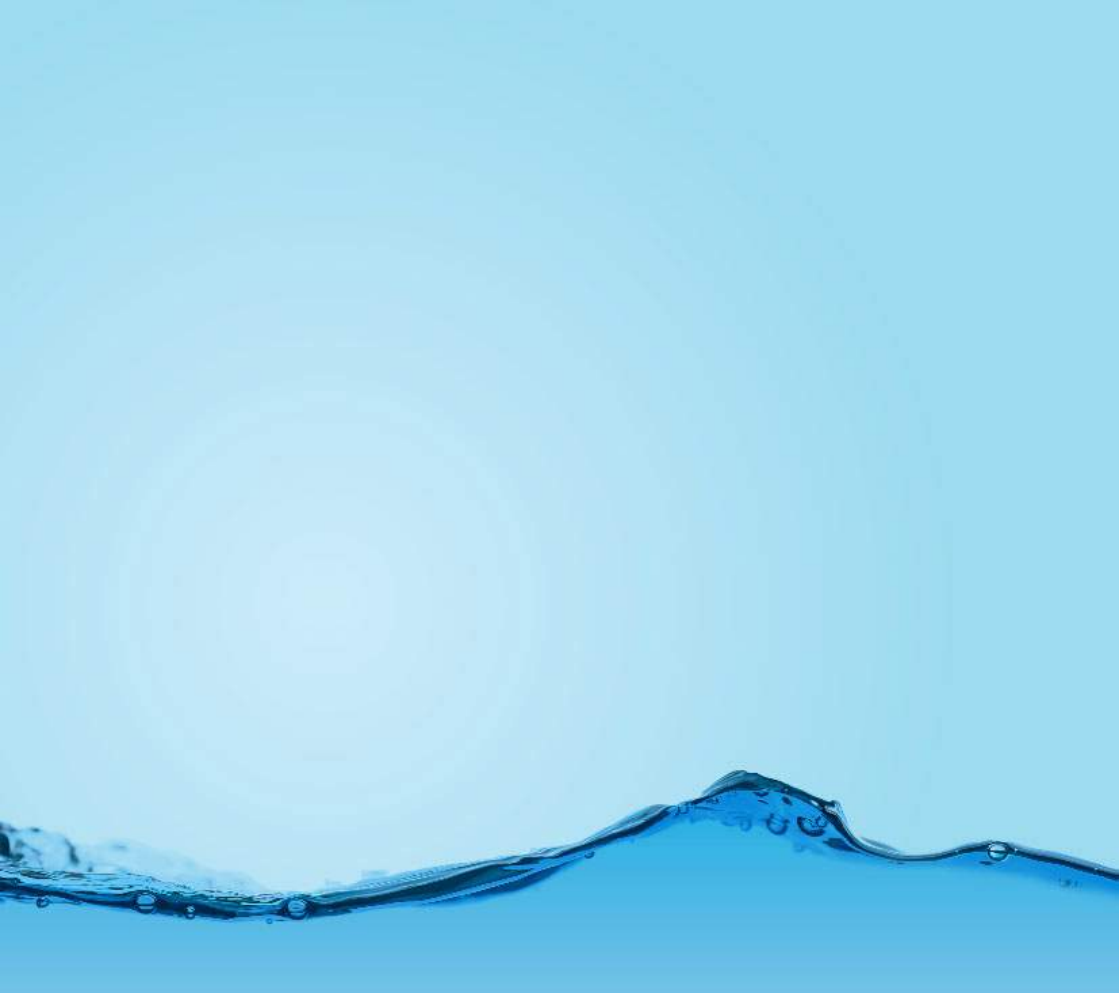

Tersedia di:



JL.RAYA JANTI NO.96 YOGYAKARTA
(0274) 493 22 88 , 08112863773 (CHAT ONLY)

f qhomemart t qhomemart @ qhomemart y qhomemart

WWW.QHOMEMART.COM

YORK®
ITALY

POMPA AIR BERKUALITAS & TERPERCAYA
www.york-jp.co.id

Copyright 2021