

# TACO

# PERFORM 300

Tersedia di:



**QHOMEMART**

JL.RAYA JANTI NO.96 YOGYAKARTA  
(0274) 493 22 88 , 08112863773 (CHAT ONLY)

f qhomemart t qhomemart @ qhomemart v qhomemart  
WWW.QHOMEMART.COM

WOOD SERIES

|            |       |               |                   |
|------------|-------|---------------|-------------------|
| Wear Layer | 0.2mm | Size          | 152.4mm x 914.4mm |
| Thickness  | 3.0mm | 24 pieces/box | 3.34sqm           |



TV 3031 Charleston Teak **NEW**



TV 3013 White Oak



TV 3003 Washed Oak



TV 3015 Vicenza Elm



TV 3030 Butternut Teak **NEW**



TV 3005 Vintage Oak



# WOOD SERIES

|            |       |               |                   |
|------------|-------|---------------|-------------------|
| Wear Layer | 0.2mm | Size          | 152.4mm x 914.4mm |
| Thickness  | 3.0mm | 24 pieces/box | 3.34sqm           |



**TV 3029** Summer Teak **NEW**



**TV 3008** Sand Malmo



**TV 3010** Warm Cherry



**TV 3006** Real Cherry



**TV 3014** Natural Beech



**TV 3004** Parma Oak



## WOOD SERIES

Wear Layer      **0.2mm**  
Thickness      **3.0mm**

Size      **152.4mm x 914.4mm**  
24 pieces/box      **3.34sqm**



**TV 3017** Original Cherry



**TV 3007** Merbau Wood



**TV 3001** Rustic Oak





# STONE SERIES

Wear Layer            **0.2mm**  
Thickness            **3.0mm**

Size                    **304.8mm x 609.6mm**  
18 pieces/box        **3.34sqm**



**TV 3032** Natural Sand **NEW**




**TV 3033** Gray Sand **NEW**



**TV 3024** Grey Slate



**TV 3026** Stone

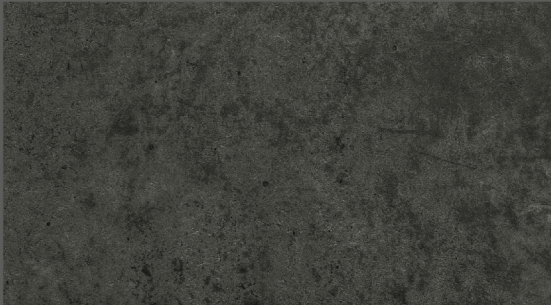

**TV 3025** Dark Grey Slate

“

We shape our homes and then  
our homes shape us.

*Winston Churchill*

”


“

Every great design begins with  
an even better story.


*Lorinda Mamo*

”

Size                    **457.2mm x 457.2mm**  
16 pieces/box        **3.34sqm**

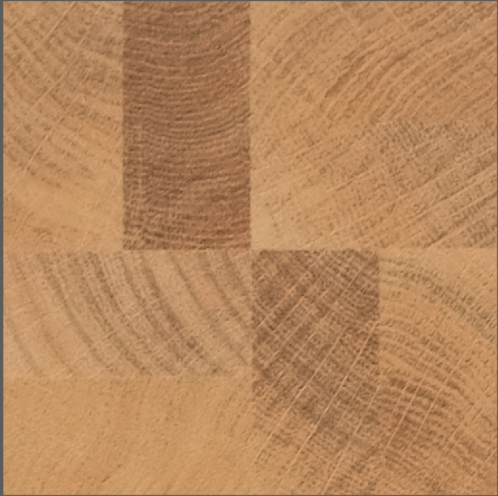

**TV 3027** Mozaic - Natural

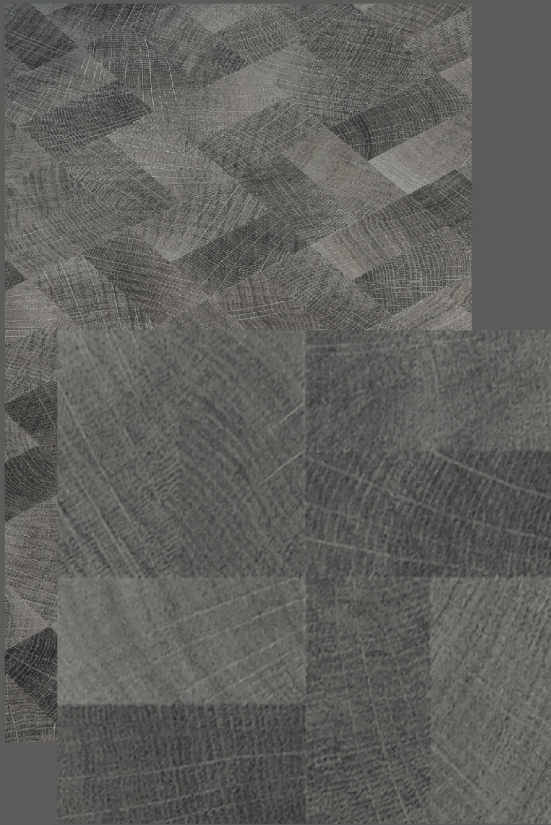

**TV 3028** Mozaic - Grey



TECHNICAL DATA

| CHARACTERISTICS                                          | TEST METHOD                                                    | PASS |
|----------------------------------------------------------|----------------------------------------------------------------|------|
| Resistance to chemicals                                  | EN423:93 Class 0                                               | ✓    |
| Bearing castor                                           | EN425:94                                                       | ✓    |
| Dimension squareness and straightness                    | EN427:94                                                       | ✓    |
| Thickness overall                                        | EN429:93                                                       | ✓    |
| Thickness wear layer                                     | EN429:93                                                       | ✓    |
| Residual indentation after static load                   | EN433:94                                                       | ✓    |
| Dimensional stability and curling after exposure to heat | EN434:94                                                       | ✓    |
| Shrinkage rate                                           | ≤0.25%                                                         | ✓    |
| Curling                                                  | ≤2mm                                                           | ✓    |
| Flexibility                                              | EN435:94(A) Bend around 20mm mandrel shows no sign of cracking | ✓    |
| Abrasion resistance                                      | EN660-1/-2                                                     | ✓    |
| Color fastness to light                                  | EN 20 ISO 105-B02 6 or above                                   | ✓    |
| Toxic element test                                       | EN 71-3                                                        | ✓    |
| Specific gravity                                         | ASTM D792:91                                                   | ✓    |
| Coefficients of friction                                 | ASTM D1894:01                                                  | ✓    |
| Sound reduction                                          | DIN52210:4db                                                   | ✓    |
| Flammability                                             | EN 71-2                                                        | ✓    |
| Smoke density                                            | DIN4102/ASTM D2843-99:Class B1                                 | ✓    |
| Electrical resistance                                    | EN1081 Method C                                                | ✓    |
| Fungus test                                              | ASTM G21:96 Grade 1                                            | ✓    |
| IMO resolution                                           | MSC61[67] Part 2                                               | ✓    |
|                                                          | MSC61[67] Part 5                                               | ✓    |

PRODUCED UNDER HIGH QUALITY SUPERVISION WITH ISO 9001 ISO 14001 OHSAS 18001 CE STDS.



100%  
WATERPROOF



EASY TO CLEAN &  
MAINTAIN




TERMITE  
PROOF



SIMPLE & QUICK  
TO INSTALL

Wood Series



Stone Series

