

TERSEDIA DI :



QHOMEMART

JL.RAYA JANTI NO.96 YOGYAKARTA
(0274) 493 22 88 , 08112863773 (CHAT ONLY)
f qhomemart t qhomemart @ qhomemart y qhomemart
WWW.QHOMEMART.COM



9001 : 2005



DAEJI
HIGH DEFINITION VINYL PLANK **대지**

ABOUT



PT Daeji Vinyl Indonesia merupakan importir vinyl flooring untuk hunian, kantor, dan ruang publik lainnya seperti sekolah, tempat ibadah, pusat perbelanjaan dan lain-lain. Daeji Vinyl hadir memberikan solusi untuk berbagai kebutuhan lantai Anda yang tidak hanya indah di pandang mata, namun juga aman bagi lingkungan dan mudah perawatannya.

Seluruh vinyl flooring yang didistribusikan Daeji Vinyl merefleksikan elemen-elemen natural dengan high definition print yang realistis sesuai dengan tema Daeji "High Definition Vinyl Plank"

Seluruh rangkain produk vinyl plank Daeji juga dilengkapi berbagai fitur penting yang sangat berguna untuk keamanan dan kenyamanan konsumen seperti lapisan perlindungan terhadap sinar UV dan lapisan Nano Silver Technology. Fitur tersebut berguna agar seluruh produk vinyl plank Daeji tidak mudah pudar, anti bakteri, anti jamur, dan anti gores, membuatnya mudah diaplikasikan sesuai kebutuhan Anda.



Saat ini **PT Daeji Vinyl Indonesia** memiliki puluhan vinyl plank yang berbeda untuk menyesuaikan beragam gaya desain ruangan Anda. Oleh karena itu, vinyl plank ini tidak hanya akan menjadi pilihan yang tepat karena fungsi, keamanan, dan kemudahan perawatannya, namun juga akan menjadi salah satu elemen penting dalam mempercantik desain interior bagi hunian atau kantor Anda.


Tersedia di :



OUR PROJECTS

Astra International
Astrido
Agung Podomoro
Lelco
Gunung Sewu
Sinarmas
Maspion
Intiland
Djarum
BCA
HSBC
FKC International
Iruma Technology
Ismaya
Vihara Jakarta Utara
Gereja Naviri
RS Bhakti Mulia
RS Bunda Mulia
Binus
Beacon Academy
Universitas Kwik Kian Gie
NJIS
Sekolah Mentari
Brain Fit
Hotel Kempinski
Hotel Sare
Hotel Max One
Hotel Rimba
Hotel Marc
Hotel Yasmin
Hotel Aston
Hotel Akmani
Hotel Grand Bali
Vihan Suites
Balai Kota Jakarta
MRT Jakarta
Unicef
Prudential
DepHub
PGN
Urban Icon
Bags City
Celebrity Fitness
Rockstar Gym
Hokben
Ricebowl
Geprek Benu
Duck King
Glass House
The Neighbourhood
48 Dimsum
Rejuve
Pizza è Birra
Urban Quarter
Tokopedia
Lazada
Bukalapak
Shopee
Gojek
Dana

And many more..

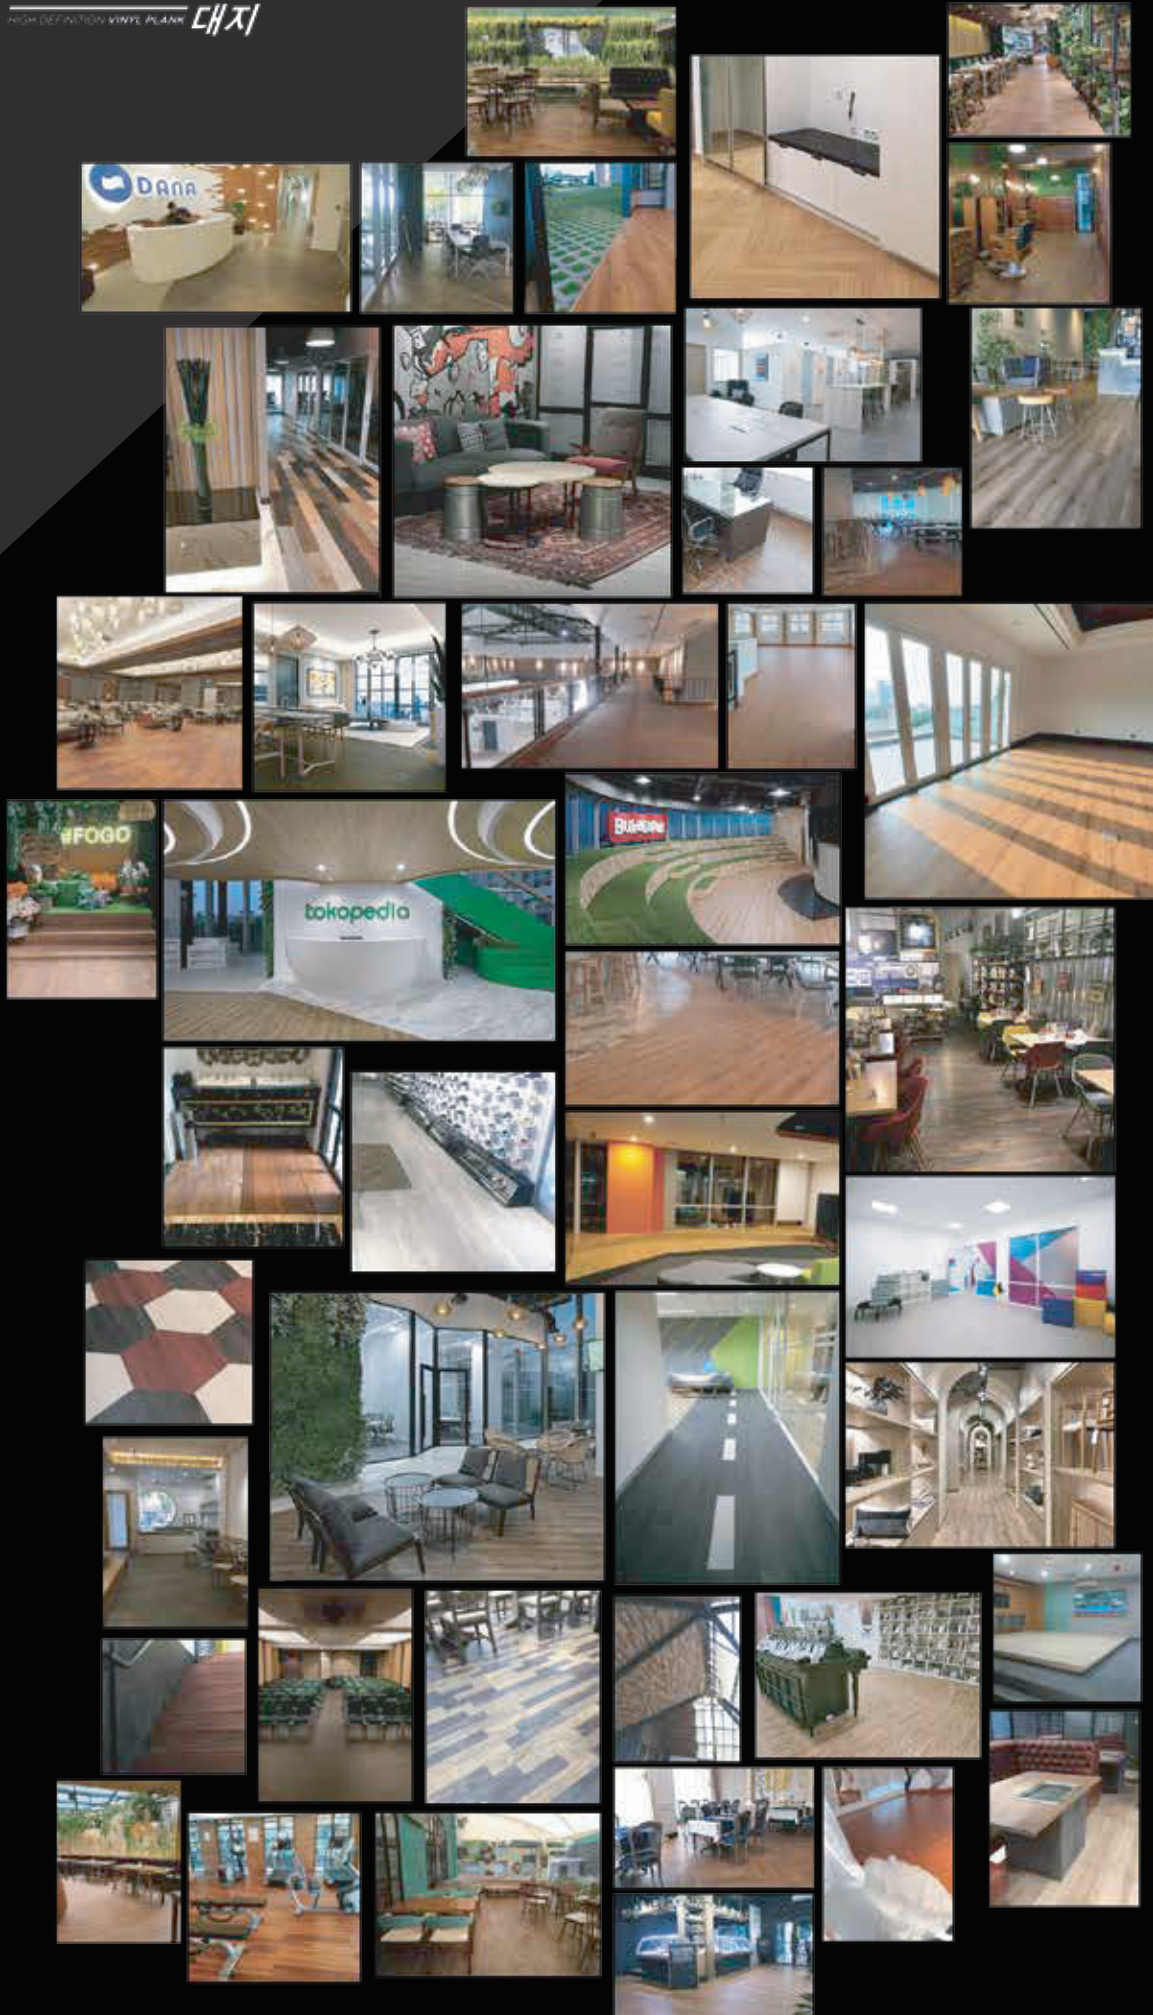


**STONE
POLYMER
COMPOSITE**



SPC Wood Herringbone


Size/plank: 600x125x4mm | Quantity/box: 28 planks, covering 2.10m²

Installation:

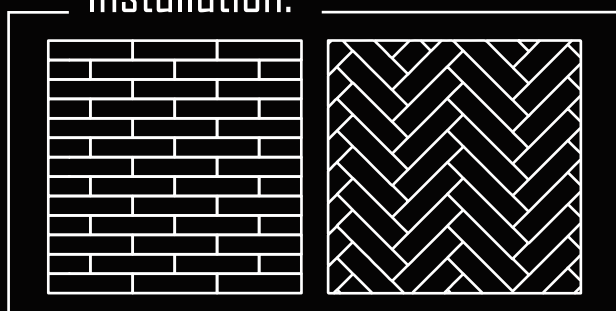

Tersedia di :

I. Structure

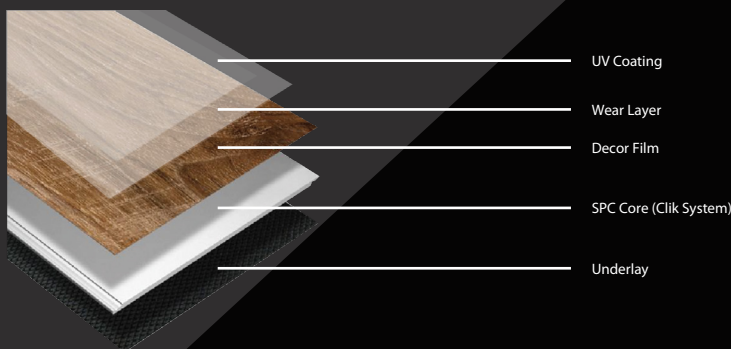

II. Specifications:

Item	Luxury SPC click flooring – Wooden design
Features	Waterproof / Anti-slip / Wear-resistance / Fire-resistance/ Noise Barrier
Applications	House/ Apartment/ Office/ Hotel/ Restaurant/ Shopping Mall/ Museum...
Size (company standard)	1220mm x 150mm / 1220mm x 180mm / 1220mm x 130mm / 1220mm x 225mm / 1235mm x 178mm
Thickness (company standard)	3.0 mm/ 3.2 mm/ 3.5mm / 4.0 mm / 5.0 mm
Wear layer (company standard)	3.0 mm/ 3.2 mm/ 3.5mm / 4.0 mm / 5.0 mm
EVA/IXPE Padding	1 mm / 1.5 mm
Surface treatment	UV coated with matt finish
Surface texture (available)	Embossed , etc...
Installation method	Valinge 2G locking system
Advantages	Long-term use, Easy installation, Cost saving, Environment Protection
Warranty	Residential: Up to 20 years; Commercial: Up to 10 years
<i>We can produce different sizes, thicknesses and colors as customers' requests.</i>	

III. Technical Data:

Tes Item	Test Result (4.0/0.3mm)	Standard	Testing Methods
Bending Strength	21.8 Mpa	≥ 16.0 Mpa	GB17657
Elasting Modulus	4376 Mpa	≥ 3500 Mpa	EN 310
Peeling Strength	86 N/50mm	≥ 70 N/50mm	EN 431
Anti Cratch	Level 1	Level 1	
Density	Core: 2100 $\pm$ 100 Wearlayer: 1200 $\pm$ 100	Core: 2100 $\pm$ 100 Wearlayer: 1200 $\pm$ 100	EN 436
Square	Pass	$q_{max} \leq 0.10$ mm	EN 13329 ISO 24342
Click pressure	188 (N/100mm)	≥ 180 (N/100mm)	NA
Click tension force	Long side: 300.00 Short side: 207.33	≥ 110 (N/50mm)	EN 684
Surface Scratch	2200 g	Weight ≥ 2000 g	ISO 1518
Castor Chair Testing	8,000 rounds	5,000 rounds	ISO 4918:2016
Scratch-resistant test	Rating 1-2	Rating 1-2	EN 16094
Impact resistance	Pass	≥ 1600 mm (big ball) ≥ 20 N (small ball)	EN 13329
Heavy mental	Not detected	Not allowed	DIN EN71-3

**STONE
POLYMER
COMPOSITE**

FT-5501

FT-5502

FT 5503

FT 5505

FT 5506

FT 5507

FT 5508

FT 5509

FT 5510

FT 6601

FT 6602

STONE POLYMER COMPOSITE

FT 6603

FT 6605

FT 6606

FT 6607

FT 6608

FT 6609


FT 6610

SPC Wood

Size/plank: 183 x 1220 x 4mm | Quantity/box: 10 planks, covering 2.24m²






TECHNICAL PERFORMANCES	STANDARDS	RESULTS
Dimensional stability after exposure to heat	EN 434-1994	W: 0,02% L: 0,05%
Curling after exposure to heat	EN 434-1994	0mm
Residual indentation	EN ISO 24343-1 : 2012	Pass (0.01mm)
Density	EN ISO 23996 : 2012	1987.2kg/m ³
Flexibility	EN ISO 24344 : 2012	10.8mm
Water absorption	EN 15534-1 : 2014	0%
Impact resistance	EN 438-2 : 2016	Max. unbroken height: 1550mm, no crack
Abrasion	EN 13329 : 2016	Ac 3
Light ageing test Xenon-arc exposure	ISO 4892-2 : 2013	Pass
Staining and resistances to chemicals	EN ISO 26987 : 2012	Pass
Fire Behavior	GB 8624 : 2012	B 1
Migration of elements	EN 71-3 : 2013	ND
Formaldehyde emission	EN717 - 1 : 2004	ND
VOC	EPA 5021A : 2014	ND

STONE POLYMER COMPOSITE

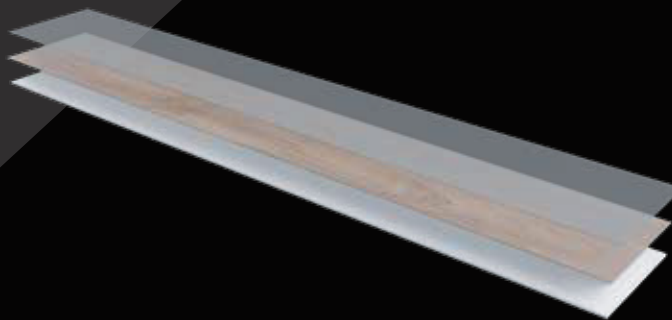


1. Enhance clarity Wear-Layer and with anti-UV, anti-Scratch & anti-Slip
2. HD printed film
3. Core Structure with density of 2000kg/m³ and strong locking system

HOW TO INSTALL

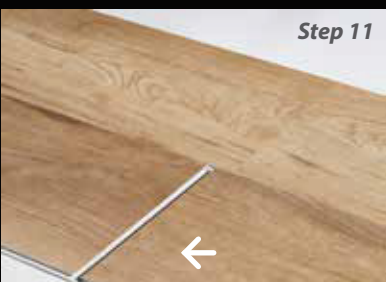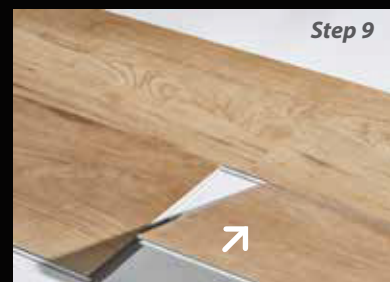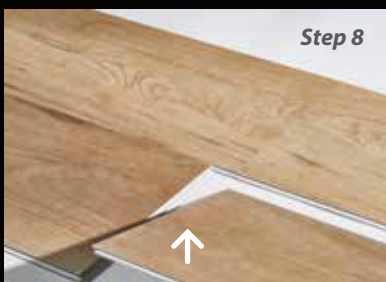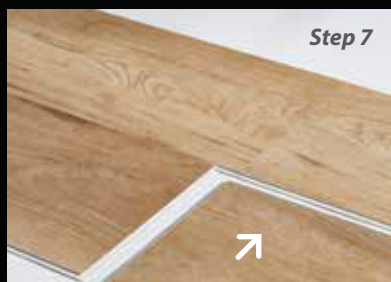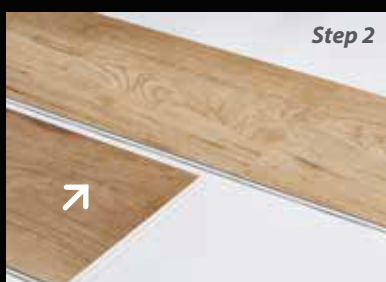

STONE POLYMER COMPOSITE


SKIRTING 10cm



New Product

ACCESSORIES


SKIRTING 8cm




STAIR NOSE



REDUCER




T-MOULDING




QUARTER ROUND



L-ENDING



U-TRACK



Pilihan Warna

5501

6601

5502

6602

5503

6603

5505

6605

5506

6606

5507

6607

5508

6608

5509

6609

5510

6610

LUXURY VINYL TILE



Stain Resistance



Waterproof



ECO friendly



Anti-Slip



Cigarette Burn
Resistance



Fire Resistance



Fade Resistance



Easy to Clean



Sound Absorbing



Anti Termite



Scratch Resistant



Zero Formaldehyde



Easy Installation

**LUXURY
VINYL
TILE**

FT
8816

FT
8818

FT
8819

FT
8820

FT
8821

FT
8822

FT
8823

FT
8825

FT
8826

New

FT
8827

FT
9901

FT
9902

FT
9903

FT
9905

New

LUXURY VINYL TILE



Stain Resistance



Waterproof



ECO friendly



Anti-Slip



Cigarette Burn
Resistance



Fire Resistance



Fade Resistance



Easy to Clean



Sound Absorbing



Anti Termite



Scratch Resistant



Zero Formaldehyde



Easy Installation

LUXURY VINYL TILE



FT
9925




FT
9927



FT
9928

Vinyl Wood

Size/plank: 184x950x3mm | Quantity/box: 19 planks, covering 3,32m²

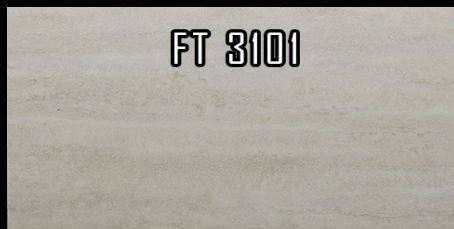


FT 3101



FT 3102



FT 3121

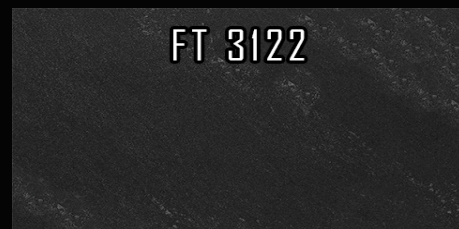

FT 3122

Vinyl Stone

Size/plank: 304,8x609,6x3mm | Quantity/box: 18 planks, covering 3,34m²




TECHNICAL PERFORMANCES	STANDARDS	RESULTS
Dimensional stability	EN 434	≤ 0.10 %
Reaction to fire	EN 13501-1	Bfl-S1
Residual indentation	EN 433	≤ 0.05 mm
Furniture leg	EN 424	No damage
Castor chair	EN 425	No damage
Curl resultant to heat	EN 434	≤ 2 mm
Under floor heating	-	Suitable – max. 27°C
Impact sound reduction	DIN 52612 T1	ΔLw = 2 dB
Reduction of in room impact noise	NF EN ISO 31-074	L _{n,e,w} = 77dB
Thermal resistance	EN 12524	0.07 m2 K/W
Light fastness	EN ISO 105-B02	≥ 5
Resistance to chemicals	EN 423	High resistance
Slip resistance	EN 13893	μ ≥ 0.30
Electrical properties	EN 1815, EN 1081	≤ 2kV on concrete, > 10 ⁹ Ω
Adhesion wear layer	EN 431	

With UV Protection and Nano Silver Technology | Wearlayer: 0,3mm

Tersedia di :




LUXURY VINYL TILE

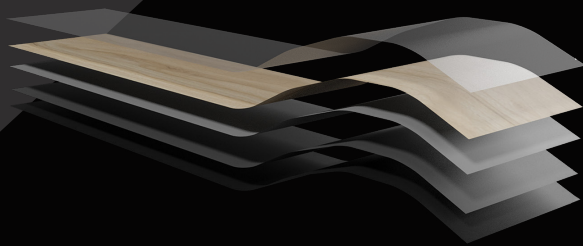

1. Wear-Layer with anti-UV Nano Silver
2. HD printed film
3. Impact-resistant vinyl core
4. Extra stabilising layer
5. Highly efficient balance sheet

ACCESSORIES

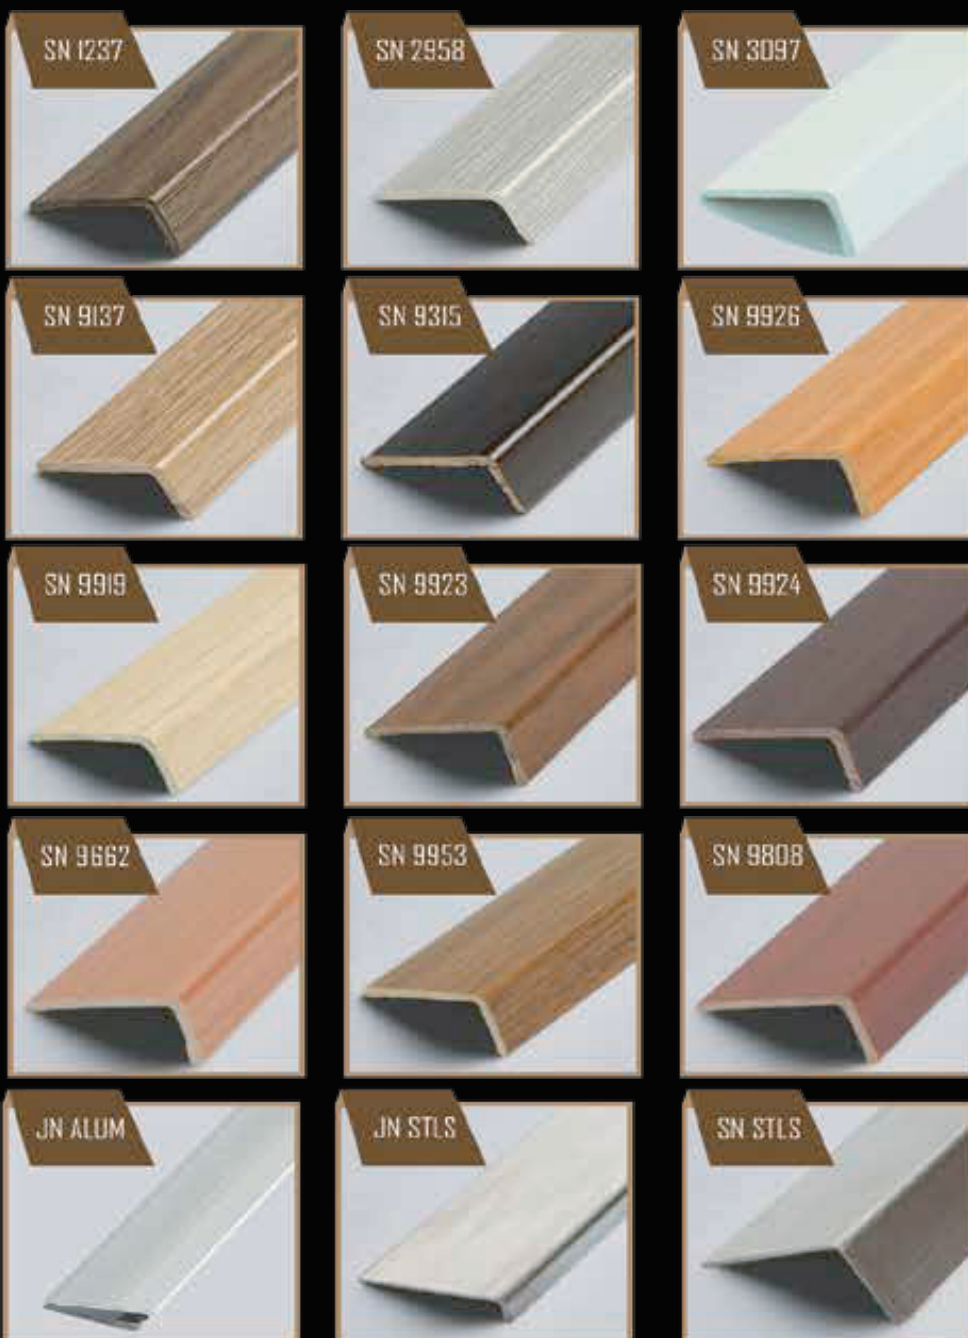

SN: Stepprossing JN: Junction ALUM: Aluminium STLS: Stainless Steel